

NOZZLE PISTOL-ONE

EN. High flow capacity nozzle for oil dispensing. "Pistol-ONE" is a new nozzle specially designed for heavy-duty work conditions, and for anyone requiring high flow rates, low flow resistance at high pressures, and ease of handling and use. The aluminium body is shock resistant, ergonomic and compact.

The valve is balanced to reduce pressure on the trigger to the utmost, to make the nozzle extremely easy to use.


ES. Pistola de elevado caudal para llenar aceite. "Pistol-ONE" es una nueva pistola, estudiada específicamente para situaciones de uso difícil y para responder a exigencias de caudales elevados, baja pérdida de carga con presiones altas y una gran manejabilidad y uso fácil. El cuerpo de aluminio, ergonómico y compacto, es resistente a los impactos. La válvula se ha equilibrado para reducir al mínimo la presión sobre el gatillo para que la pistola sea extremadamente fácil de utilizar.

RU. Высокопроизводительный пистолет для подачи масла. "Pistol-ONE" – это новый пистолет, специально разработанный для использования в сложных условиях, когда требуется высокая производительность, низкая потеря напора при высоком давлении, высокая маневренность и простота использования. Ударопрочный, эргономичный и компактный корпус изготовлен из алюминия. Клапан сбалансирован, чтобы до минимума снизить давление на спусковой рычаг, что существенно упрощает использование пистолета.

PERFORMANCE

- Nominal flow rate 90 l/min
- Max operating pressure 100 Bar
- Burst pressure 300 Bar
- Flow resistance 0.6 bar at 60 l/min.
- Trigger operating force at 100 Bar: 9 Kg
- Caudal nominal 90 l/min
- Máxima presión de funcionamiento 100 bar
- Presión de estallido 300 bar
- Pérdida de carga < 0,6 bar a 60 l/min
- Fuerza de accionamiento gatillo a 100 bar: 9 Kg
- Номинальный расход 90 л/мин
- Максимальное рабочее давление 100 бар
- Давление разрыва 300 бар
- Потеря напора 0,6 бар при 60 л/мин.
- Сила давления на спусковой рычаг при 100 бар: 9 кг

DIMENSIONS

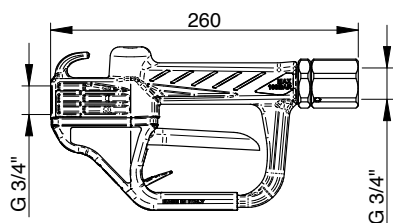

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
F00640000	1,3	2,9	300x180x80	11,8x7,1x3,1	1
F00640010	1,9	4,2	300x180x80	11,8x7,1x3,1	1
F00640020	2,0	4,2	300x180x80	11,8x7,1x3,1	1

Flow-rate

up to
90 l/min
(up to 23,8 gpm)

Work. pressure

100 bar

PIUSI[®]

ON REQUEST

Rigid spouts:

Mod. BPS B/P
Code **F16005010**
with semi-automatic
no-drip valve



Flexible spouts:

Mod. BPS B/P
Code **F16004010**
with semi-automatic
no-drip valve



PISTOL-ONE

PISTOL-ONE
+ rigid spout

PISTOL-ONE
+ flexible spout

FEATURES

Semi-automatic
no drip valve



PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids type	Spout		Inlet
			Rigid	Flexible	
F00640000	PISTOL-ONE + swivel 3/4"		-	-	3/4" BSP
F00640010	PISTOL-ONE + swivel 3/4" + Rigid spout		YES	-	3/4" BSP
F00640020	PISTOL-ONE + swivel 3/4" + Flexible spout		-	YES	3/4" BSP

DISPENSERS

PUMPS

METERS

NOZZLE
METERS

NOZZLE

SPECIAL
EQUIPMENTS

FLUID
MONITORING

HOSE
REEL

FILTERING

ACCESSORIES